

Manual Surface Grinders

714, 914, 918, 1020, 1224, 1628

Manufactured to exact tolerance :

PARALLELISM

Longitudinal axis : 0.010/300mm

Cross axis : 0.010/300mm

Vertical axis : 0.01/300

SQUARENESS

X-Y-Z axis


0.010/300mm

FLATNESS

0.010/300mm

SPINDLE RUN OUT

0.010

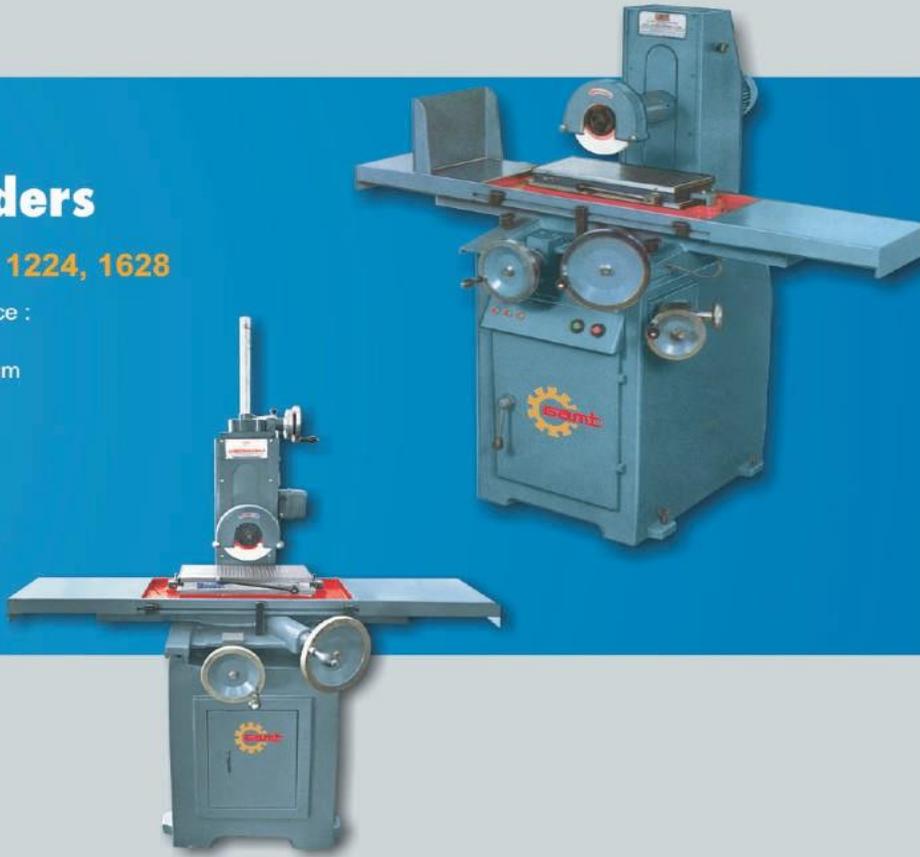

Specifications

	Unit	714	914	918	1020	1224	1628
Working Surface of the Table	mm	175 x 350	225 x 350	225 x 450	250 x 500	300 x 600	400 x 700
Max. Height from Table to Grinding Wheel	mm	175	275	275	275	275	275
Vertical Feed Least Count	mm	0.01	0.01	0.01	0.002	0.002	0.002
Cross Feed Least Count	mm	0.05	0.05	0.05	0.05	0.05	0.05
Spindle Speed	R.P.M.	2800	2800	2800	2800	2800	2800
Size of Grinding Wheel	mm	175x13x31.75	200x13x31.75	200x13x31.75	200x20x31.75	200x20x31.75	200x20x31.75
Magnetic Chuck	mm	150 x 300	200 x 300	200 x 450	200 x 500	250 x 500	300 x 600
Electric Motor	HP RPM	1 / 3 Phase 3/4 HP 2800	1 / 3 Phase 1HP 2800	1 / 3 Phase 1/1.5 2800	2 / 3 Phase 2 HP 2800	2 / 3 Phase 2 HP 2800	2 / 3 Phase 2 HP 2800
Diamond Dresser	Cr.	0.5	0.5	0.5	0.5	0.5	0.5
Wheel Balancing Stand	--	One	One	One	One	One	One
Net Weight (Approx.)	Kgs.	650	750	850	1000	1150	1250

• illustrations and specifications are subject to change without notice.

